

1/26

FIG. 1


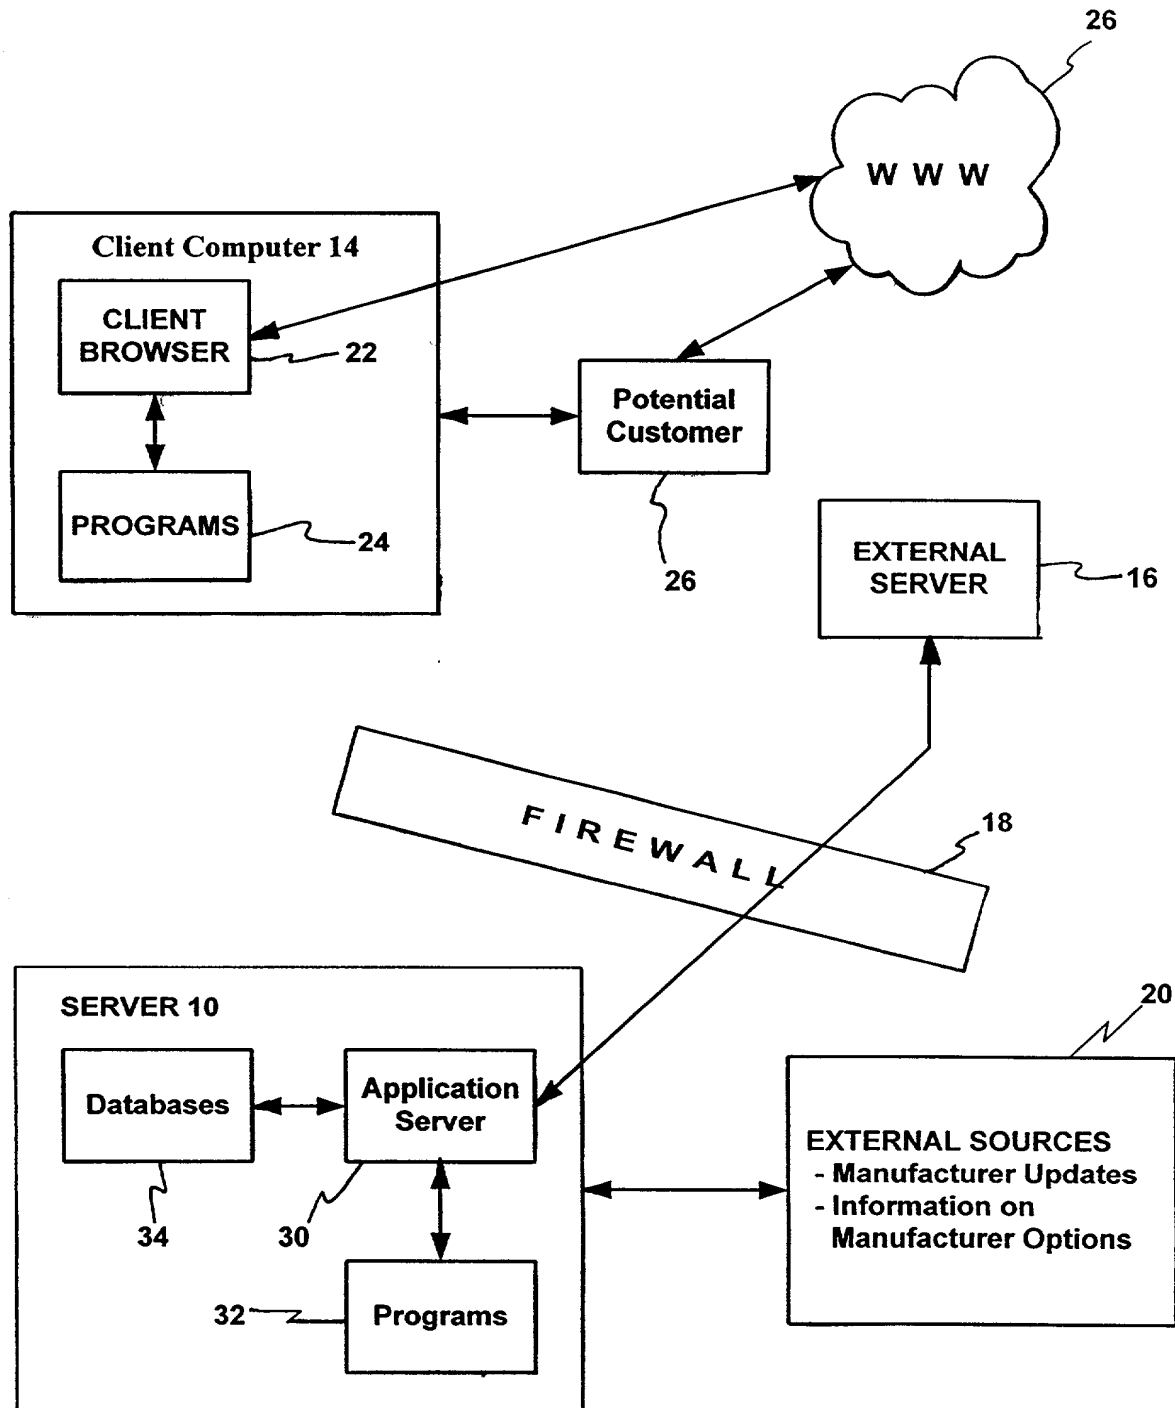



FIG. 2

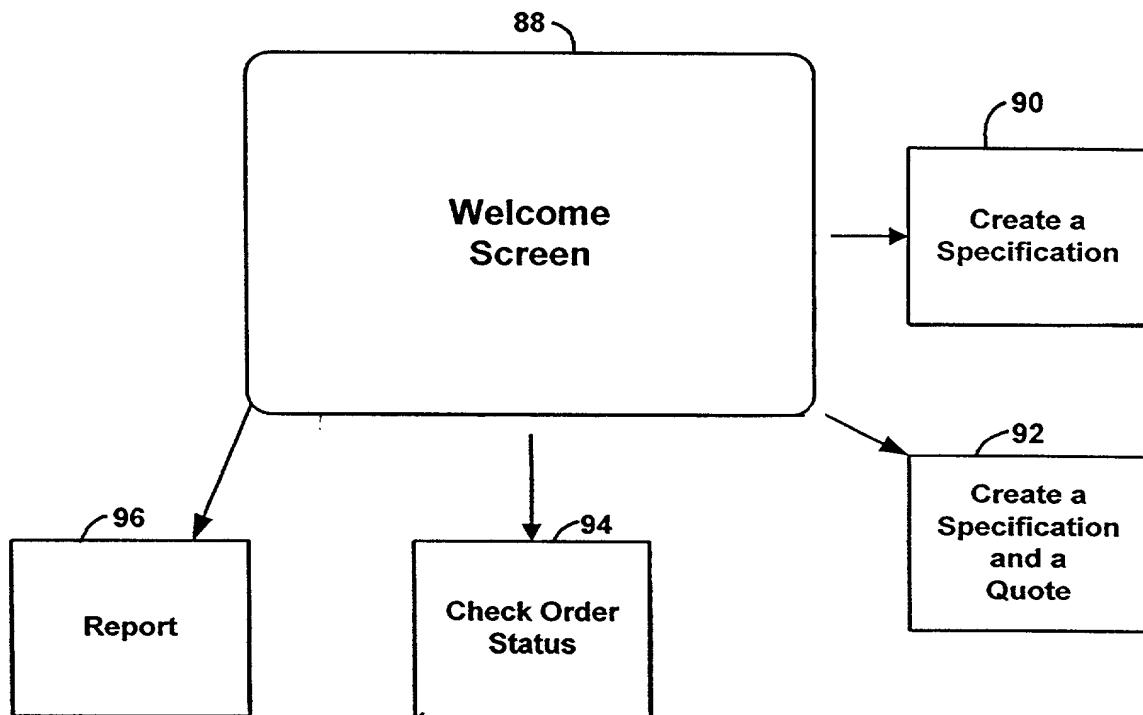

3/26

Truck Spec #1 - Chasis

Truck EZ Specs



Medium Duty Truck EZ Spec #1

FIG. 3

GE Standard Chassis Spec | Go to GE Standard Body Spec

GENERAL MOTORS

FORD

FREIGHTLINER

INTERNATIONAL

STERLING

GE Capital Fleet Services

**STANDARD SPEC 1 -- WB 203 -- CA 138 -- GVW 26,000 -- Approximate
Payload 12,000 Lb.**

ENGINE:

210HP 560lbs torque @ 1400 RPM

ENGINE EQUIPMENT:

Clutch Eaton 14" two plate
Block Heater Phillips 1000 watt
Exhaust Single RH Horz Muffler
Fan Drive Viscous
Fuel Filter
Anti Freeze -30 Degrees
Alternator 100 Amp
Batteries (2) GRP 31 1520 CCA
Starter Deco 41MT

TRANSMISSION:

Fuller six speed
Magnetic Engine Drain Trans/R Axle
Fill and drain plugs

FRONT AXLE:

8,000 LB. Capacity
Front Shock Absorbers
9,000 LB. Front Springs
Power Steering TRW TAS65

REAR AXLE:

17,500 LB. Capacity
18,000 to 20,000 LB.. Rear Suspension
Spring
Synthetic Lube Frt. RR & Transmission
Ratio 4.10

BRAKES:

Hydraulic Brakes
Anti-Lock Braking System

FRAME:

5/16" x 3" x 10 1/8"
Wheel Base approx. 204" w/ca 138
End of Frame Square

FUEL TANKS:

Single 50 Gallon Tank
Fuel Water Separator w/Heat

TIRES AND WHEELS:

10R22.5 Front Tires
10R22.5 Rear Tires
Wheels Disc 22.5 x 7.50 Frt. & RR

CAB EQUIPMENT:


SS Mirrors Heated
Convex Mirrors
Bench Seat Vinyl
Circuit Breakers
Am/Fm Stereo
Tinted Glass
Fire Extinguisher
Triangle Flare & Safety Kit
Back Up Alarm
Intermittent Wipers
Paint One Color

4/26

Truck Spec #1-Navistar

FIG.4a

Truck EZ Specs



Medium Duty Truck EZ Spec #1

View GE Standard Chassis Spec

PETERBILT **KENWORTH** **FREIGHTLINER** **INTERNATIONAL** **STERLING**

GE Capital Fleet Services

**INTERNATIONAL SPEC 1 - WB 203 - CA 138 - GVW 26,000 - Approximate
Payload 12,000 Lb.**

MODEL 4700 4 X 2 S/A TRUCK

\$38,710.12

GO TO:

SELECT OPTIONS | CALCULATE SUBTOTAL (CHASSIS)



ENGINE:

DT466 215HP @2300 RPM 560 lb. torque

ENGINE EQUIPMENT:

Two Plate 14" clutch
Block Heater Phillips 120v, 1250 Watt
Exhaust single horizontal muffler
Fan drive viscous
100 Amp alternator
Two 12v 1300 cca batteries
Starter MT-37 type 350
Back up Alarm
Silicone Hoses (Radiator)

Transmission:

International 6 Plus (ES56-7B)
Transmission EM GARD 50W) Synthetic

FRONT AXLE:

8,000 Lb.
Front Shocks
9,000 Lb. Spring capacity

REAR AXLE:

17,500 Lb. Rear Axle
20,000 Lb. Capacity springs
Shock absorbers

BRAKES:

Hydraulic Split System w/4 channel ABS
Parking Brake DCM type 12" x 4"
Ft Brakes 15.00 x 1.44 Rotors
RR Brakes 15.00 x 1.44 Rotors

FRAME:

Wheel Base 206 - CA 138
Rails 10.00 x 3.00 x .250 High strength
Alloy Stl
Reinforced Frame Partial Inverted L 50,000
PSI
Full Width Bumper Aerodynamic

FUEL TANKS:

Single 50 gallon fuel tank
Fuel water separator w/heat
Fuel tank top draw

TIRES AND WHEELS:

Frt 10Rx 22.5 Goodyear G159
RR 10Rx 22.5 Goodyear G167
Frt Wheels 22.5 x Steel disc
RR Wheels 22.5 x Steel disc

CAB EQUIPMENT:

Cab Conventional 80"

5/26

FIG.4b

Truck Spec #1-Navistar

Glass Tinted
Color Interior Pearl Gray
Mirrors West Coast 16 x 7" Heated for 102"
wide
Convex mirrors 8"
Interior Trim Deluxe
Exterior Color White
Intermittent wipers
AM/FM Stereo
Halogen head lights
Day time running lights
Cigar lighter

[Back To Top](#)

Select Options:

WHEEL BASE OPTIONS:

- ☐ APPROX 218 WITH 150 CA (20' BODY)
\$N/C
- ☐ APPROX 238 WITH 168 CA (22' BODY)
\$N/C
- ☐ APPROX 254 WITH 186 CA (24' BODY)
\$268.00

FUEL TANKS:

- ☐ DUAL 50 GALLON ILO SINGLE \$
262.00

CAB OPTIONS:

- ☐ AM/FM STEREO WITH CASSETTE
\$42.00
- ☐ AIR CONDITIONING \$640.00

ENGINES AND TRANSMISSIONS:

- ☐ 230 HP ENGINE @ 2300 RPM 620FT lbs
\$1,185.00 (INCLUDES ESO66-7B
TRANSMISSION)
- ☐ ALLISON MD3060P ILO OF MANUAL
\$6,673.00

[Back To Top](#)

Calculate Subtotal (Chassis):


38710.12 — 55

[Back To Top](#)

6/26

Truck Spec #1 - Body

Truck EZ Specs



Medium Duty Truck EZ Spec #1

FIG. 5

GE Standard Body Spec | Go to GE Standard Chassis Spec

MORGAN

SUPREME

GRUMMAN OLSON

GE Capital Fleet Services STANDARD BODY SPEC 1

SIDE PANELS

.040" PREPAINTED WHITE ALUMINUM
WITH Z-POSTS ON 16" CENTERS

FRONT END

AERODYNAMIC RADIUS DESIGN

FLOOR

1 1/8" LAMINATED HARDWOOD, TWO
SCREWS PER BOARD PER CROSSMEMBER;
THRESHOLD FLUSH TO REAR WITH DRAIN
HOLES

UNDERESTURCTURE

FOR SINGLE AXLE - 3" STEEL I-BEAMS ON
12" CENTERS WITH STEEL PAN OVER
TIRE AREA; 4" STEEL I-BEAM
LONGITUDINAL RAILS; MYLAR TAPE
BETWEEN CROSSMEMBER AND BOTTOM
RAIL

INTERIOR LINER

SIDES - 3/8" PLYWOOD, FULL HEIGHT

INTERIOR LINER

FRONT - 1/2" PLYWOOD, FULL HEIGHT

ROOF

ONE PIECE CROWNED ROOF - .032"
ALUMINUM SHEET; TENSION INSTALLED
OVER GALVANIZED STEEL ROOF BOWS
ON 24" CENTERS WITH ADHESIVE

REAR FRAME

PAINTED GALVANNEALED STEEL WITH
BUILT-IN CLEARANCE LIGHT PROTECTING
HEADER; GRAB HANDLE ON CURBSIDE

REAR DOOR

TODCO PLASTIC COVERED OVERHEAD

EXTERIOR LIGHTS

GROTE TURTLEBACK - PER FMVSS-108
SPECIFICATIONS, INCLUDING
REFLECTORS

INTERIOR LIGHT

DOMELIGHT WITH SWITCH IN CAB

DOCK BUMPER

10" WOOD FILLED

D.O.T. UNDERRIDE


5" STRUCTURAL STEEL UNDERRIDE
PROTECTOR WITH POOCHED
HORIZONTAL SURFACE

MOUNTING

UNDERCOATED; MOUNTED WITH
TAPERED WOOD SLEEPER SLATS AND
5/8" DIAMETER STEEL U-BOLTS
PAINTED; BLACK; MORGAN ANTI-SAIL
MUD FLAPS INSTALLED

FOB POINT: FACTORY

Truck EZ Specs



**Medium
Duty
Truck EZ Spec #1**

FIG. 6a

View GE Standard Body Spec

MORGAN

SUPREME

GRUMMAN OLSON

GE Capital Fleet Services
MORGAN STANDARD SPEC 1

GO TO:

**SELECT VAN BODY | SELECT OPTIONS | CALCULATE SUBTOTAL (BODY) |
CALCULATE TOTAL PRICE**

SIDE PANELS

.040" PREPAINTED WHITE ALUMINUM
WITH Z-POSTS ON 16" CENTERS

FRONT END

AERODYNAMIC RADIUS DESIGN

FLOOR

1 1/8" LAMINATED HARDWOOD, TWO
SCREWS PER BOARD PER CROSSMEMBER;
THRESHOLD FLUSH TO REAR WITH DRAIN
HOLES

UNDERESTURCTURE

FOR SINGLE AXLE - 3" STEEL I-BEAMS ON
12" CENTERS WITH STEEL PAN OVER
TIRE AREA; 4" STEEL I-BEAM
LONGITUDINAL RAILS; MYLAR TAPE
BETWEEN CROSSMEMBER AND BOTTOM
RAIL

INTERIOR LINER

SIDES - 3/8" PLYWOOD, FULL HEIGHT

INTERIOR LINER

FRONT - 1/2" PLYWOOD, FULL HEIGHT

ROOF

ONE PIECE CROWNED ROOF - .032"

REAR FRAME

PAINTED GALVANNEALED STEEL WITH
BUILT-IN CLEARANCE LIGHT PROTECTING
HEADER; GRAB HANDLE ON CURBSIDE

REAR DOOR

TODCO PLASTIC COVERED OVERHEAD

EXTERIOR LIGHTS

GROTE TURTLEBACK - PER FMVSS-108
SPECIFICATIONS, INCLUDING
REFLECTORS

INTERIOR LIGHT

DOMELIGHT WITH SWITCH IN CAB

DOCK BUMPER

10" WOOD FILLED

D.O.T. UNDERRIDE

5" STRUCTURAL STEEL UNDERRIDE
PROTECTOR WITH POOCHED
HORIZONTAL SURFACE

MOUNTING

UNDERCOATED; MOUNTED WITH
TAPERED WOOD SLEEPER SLATS AND
5/8" DIAMETER STEEL U-BOLTS
PAINTED; BLACK; MORGAN ANTI-SAIL

8/26

Truck Spec #1 - Body: Morgan

FIG. 6b

ALUMINUM SHEET; TENSION INSTALLED
OVER GALVANIZED STEEL ROOF BOWS
ON 24" CENTERS WITH ADHESIVE

MUD FLAPS INSTALLED

FOB POINT: FACTORY

[Back To Top](#)

Select Van Body:

	MODEL					
	Interior Height/Rear Door Opening (In Inches)					
	GVSD79 79 ¹ / ₈ - 73 ¹ / ₄	GVSD85 85 ¹ / ₈ - 79 ¹ / ₄	GVSD91 91 ¹ / ₈ - 85 ¹ / ₄	GVSD97 97 ¹ / ₈ - 91 ¹ / ₄	GVSD103 103 ¹ / ₈ - 97 ¹ / ₄	GVSD109 109 ¹ / ₈ - 103 ¹ / ₄
18'	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Body	\$4,495.00	\$4,544.00	\$4,595.00	\$4,665.00	\$4,823.00	\$4,865.00
20'	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Body	\$4,751.00	\$4,800.00	\$4,852.00	\$4,927.00	\$5,104.00	\$5,145.00
22'	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Body	\$5,129.00	\$5,184.00	\$5,239.00	\$5,318.00	\$5,500.00	\$5,546.00
24'	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Body	\$5,398.00	\$5,547.00	\$5,526.00	\$5,592.00	\$5,780.00	\$5,825.00

[Back To Top](#)

Select Options:

	18' Body	20' Body	22' Body	24' Body
Translucent Roof:	<input type="checkbox"/> \$81.00	<input type="checkbox"/> \$90.00	<input type="checkbox"/> \$99.00	<input type="checkbox"/> \$108.00
"E" Track (recessed):	<input type="checkbox"/> \$148.00	<input type="checkbox"/> \$165.00	<input type="checkbox"/> \$181.00	<input type="checkbox"/> \$198.00
Scuff Liner (12ga x 16" steel):	<input type="checkbox"/> \$214.00	<input type="checkbox"/> \$218.00	<input type="checkbox"/> \$247.00	<input type="checkbox"/> \$253.00

☐ Tie Rings (@ \$7.00 each) QTY:

☐ Forklift Package \$256.00

NOTE: Must check interior body height and door opening.

9/26

FIG. 6c

Truck Spec #1 - Body: Morgan

	10'	12'	14'
Walk Ramp:	┌ \$392.00	┌ \$418.00	┌ \$466.00

Lift Gates:	2000 LB	2500 LB	3000 LB
Waltco 72x32 W/4" RAMP	┌ \$1390.00	N/A	N/A
Maxon 72x25LMR	N/A	┌ \$1570.00	N/A
Maxon 40x72	N/A	N/A	┌ \$2090.00
Waltco 72X38 W/4" RAMP	N/A	┌ \$1579.00	┌ \$1753.00

NOTE: ALL PRICING IS CURRENT AS OF THIS DATE AND CAN CHANGE WITHOUT NOTICE DUE TO MANUFACTURERS PRICE INCREASE

[Back To Top](#)

Calculate Subtotal (Body):


[Back To Top](#)

Calculate Total Price (Chassis + Body):

[Back To Top](#)

Truck EZ Specs

FIG. 7a



Medium Duty Truck EZ Spec #2

GE Standard Chassis Spec | [Go to GE Standard Body Spec](#)

GENERAL MOTORS

FORD

FREIGHTLINER

INTERNATIONAL

STERLING

GE Capital Fleet Services

**STANDARD SPEC 2 - WB 206 - CA 138 - GVW 33,000 - APPROX. PAYLOAD
14,000 - 18,000 LB**

ENGINE:

250HP @2300 RPM 660 lb. torque

ENGINE EQUIPMENT:

Two Plate 14" clutch

Block Heater Phillips 120v, 1250
Watt

Exhaust single horizontal muffler

Fan drive viscous

100 Amp alternator

Two 12v 1300 cca batteries

Starter MT-37 type 350

Back up Alarm

Silicone Hoses (Radiator)

Transmission:

6 Speed Transmisson

Transmission EM GARD 50W)

Synthetic

FRONT AXLE:

12,000 Lb.

Front Shocks

12,000 Lb. Spring capacity

REAR AXLE:

21,000 Lb. Rear Axle

23,500 Lb. Capacity springs

Shock absorbers

Aux. Rear Springs 4.500 Lb.

BRAKES:

Air Brake system ABS

Air Dryer AD-9 Heated

Ft Brakes 15.00 x 4 "

RR Brakes 16.5 x 7.0"

FRAME:

Wheel Base 206 - CA 138

Rails 10.00 x 3.00 x .250 High strength

Alloy Stl

Reinforced Frame Partial Inverted L

50,000 PSI

Full Width Bumper Aerodynamic

FUEL TANKS:

Single 50 gallon fuel tank

Fuel water separator w/heat

Fuel tank top draw

TIRES AND WHEELS:

Frt. 11Rx 22.5 Goodyear G159

RR 11Rx 22.5 Goodyear G167

Frt. Wheels 22.5 Steel disc

RR Wheels 22.5 Steel disc

CAB EQUIPMENT:

Cab Conventional 100.8"

Glass Tinted

Color Interior Pearl Gray

Mirrors West Coast 16 x 7" Heated for
102" wide Convex mirrors 8"

Interior Trim Deluxe

Exterior Color White

11/26

FIG. 7b

Truck Spec #2 - Chasis

Intermittent wipers
AM/FM Stereo
Halogen head lights
Day time running lights
Cigar lighter


[illegible]

Truck Spec #2 - Freightliner

12/26

Truck EZ Specs

FIG. 8a



**Medium
Duty
Truck EZ Spec #2**

View GE Standard Chassis Spec

GENERAL MOTORS

FORD

FREIGHTLINER

INTERNATIONAL

STERLING

GE Capital Fleet Services
Freightliner SPEC 2 -- WB 204 -- CA 138 -- GVW 33,000 -- Approx. Payload
14,000 to 18,000 Lb.
MODEL FL70 S/A Truck
\$37,800.00

GO TO:

SELECT OPTIONS | CALCULATE SUBTOTAL (CHASSIS)

ENGINE:

CAT CFE 250 HP@ 2200RPM 660 lb.
Torque

ENGINE EQUIPMENT:

Clutch: Two plate 14" Ceramic
Block Heater: Phillips 1000 Watt/120V

Exhaust: Single Horizontal Muffler
Fan Drive: Viscous
Alternator: 100 Amp, Delco 22-SI
Batteries: Two 12V 1850 CCA
Starter: Delco 41 Type MT400
Compressor: Bendix 13.2 CFM
Coolant Hoses: Gates Blue Stripe

Transmission:

Fuller FS6406A 6 Speed
Lube: Mobil Synthetic 50 Wt.

FRONT AXLE:

Meritor FF-961 12,000 GVW
Front Shock Absorbers
12,000 lb. Capacity

REAR AXLE:

BRAKES:

Brake Package: Air - ABS
Front: Mertior Cam 15"x4" Q+
Rear: Meritor Cam 16.5x7 Q+
Air Dryer: Bendix AD-9 With Heater

FRAME:

Frame Rails: 5/16"x3"x10 1/8"
Reinforcement: Outer Frame 1/4"
Bumper: 12" Painted, Three Piece Steel
Hooks: Two Front Frame Mounted

FUEL TANKS:

RH: 45 Gallon Long
LH: Optional
Fuel/Water Separator: Racor #325R
Heated

TIRES AND WHEELS:

Frt: 11R22.5 Michelin XZA2
RR: 11R22.5 Michelin XM+S4
Frt. Wheels: 22.5 Steel Disc
RR: Wheels: 22.5 Steel Disc

CAB EQUIPMENT:

Cab Conventional 106"
Glass: Tinted

13/26

FIG. 8b

Truck Spec #2 - Freightliner

Meritor RS-21-145 21,500 lb. Capacity

Suspension: 23,000 lb capacity

Axle Ratio: 4.11

Lube: Mobil Synthetic 50 wt.

Interior color: Gray Vinyl

Mirrors: SS West Coast With Heat

Mirrors: LH,RH 8" Convex, Bright

Interior Trim: Custom

Exterior Color: White

Wipers: Intermittent

Radio: AM/FM STEREO w/Weatherband

Headlights: Single halogen w/day
running lamps

Lighter: Cigar

Alarm: Backup

[Back To Top](#)

Select Options:

WHEEL BASE OPTIONS:

☐ APPROX 229 WITH 156 CA (20' BODY)
\$N/C

☐ APPROX 241 WITH 168 CA (22' BODY)
\$N/C

☐ APPROX 259 WITH 186 CA (24' BODY)
\$N/C

CAB OPTIONS:

☐ AIR CONDITIONING \$487.41

☐ AIR DRIVERS SEAT (SELF CONTAINED)
\$96.00

☐ PASSENGER SEAT (FIXED) \$ 321.00

☐ CLOTH SEATS \$ 321.00

ENGINES AND TRANSMISSIONS:

☐ 230 HP ENGINE WITH 6 SPEED
TRANS. \$1,923.00 (FULLER 6 SPEED
FS5306)

☐ 250 HP ENGINE WITH 6 SPEED
TRANS. Standard (FULLER FS6306)

FUELTANKS:


☐ DUAL 50 GALLON \$1,030.00

[Back To Top](#)

Calculate Subtotal (Chassis):

[Back To Top](#)

Truck EZ Specs

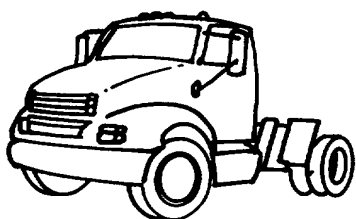

City Tractor Truck EZ Spec #3

FIG. 9a

GE Standard Chassis Spec



GE Capital Fleet Services

STANDARD SPEC 3 -- WB 169 -- CA 103 -- GVW 65,000 -- Approximate Payload 28,000 Lb.

ENGINE:

380 HP @1800 RPM 1450 Torque Lbs.

ENGINE EQUIPMENT:

Fan Drive on/off Kysor
Gates Blue Stripe Radiator Hoses
Block Heater 120v 1500 watt
Alt. 130 Amp
Batteries (3) Maintenance Free 2250 CCA
Radiator Anti Freeze -30 degrees
42MT with Over Crank Starter
Circuit Breakers
Electronic Governor
Vertical Exhaust RH Bright Muffler Shield
Air Dryer Bendix AD-IP

Transmission:

10 Speed Transmission
Oil Cooler
Clutch Eaton Fuller 15.5 Two Plate Easy Pedal
Synthetic Oil
Drive Shaft Meritor 18T 1/2 Round Yoke

FRONT AXLE:

12,000 Lb. Capacity
12,000 Lb. Frt. Suspension
Shock Absorbers
Spring Pins Rubber Bushing
Slack Adjusters Automatic

REAR AXLE:

BRAKES:

ABS Air Brakes
15.0 x 4.0" Air S Cam Frt.
16.5 x 7.0" Air S Cam RR
Drain Valve Cable Operated
Hand Control & Tractor Protection Valves

FRAME:

10.125" x 3.580" x .312"
Deck Plate 15"
Frt. Tow Hooks
Frt. Bumper Full Width Light Weight
5th Wheel Stationary
12' Elec. And Air Hoses

FUEL TANKS:

100 Gal. Tank
Fuel Water Separator Con Met CMI
680w/ Heat

TIRES AND WHEELS:

11R22.5 Frt. Goodyear G159
11R22.5 RR Goodyear G167A
22.5 x 8.25 Disc Wheels Frt.
22.5 x 8.25 Disc Wheels Rear

CAB EQUIPMENT:

Conventional Cab
Air Conditioning
Dual Rect. 16 x 7" Heated
Dual Convex Mirrors
One Convex Mirror Hood Mounted RH
Driver Seat High Back Air


FIG. 9b

Truck Spec #3 - Chasis

Meritor RS-23-160 23,000 Lb. Capacity
Rear Suspension 23,000 Lb. Capacity
Magnetic Drain Plug
Synthetic Lube
Slack Adjusters Automatic

Pass Seat Non-Suspension Intermediate
Back
AM/FM Stereo
Ext. Sun Shade
Gauges – Engine oil, Air and Air Cleaner
Restrict. Access Frame Non Bright
Steering Wheel Non Telescoping
Intermittant Wipers
Color White

Truck EZ Specs

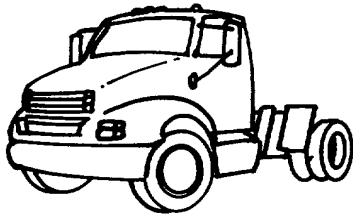

**City
Tractor
Truck EZ Spec #3**

View GE Standard Chassis Spec

PETERBILT KENWORTH FREIGHTLINER INTERNATIONAL STERLING

GE Capital Fleet Services

**KENWORTH SPEC 3 - WB 170 - CA 96 - GCW 55,000 - 65,000 Lb. - PAYLOAD
APPROX. 28,000 lb**

MODEL KENWORTH T600B

\$70,390.00

GO TO:

SELECT OPTIONS | CALCULATE SUBTOTAL (CHASSIS)

ENGINE:

CAT C-12 380HP@1800 RPM 1450
torque

ENGINE EQUIPMENT:

Clutch: Fuller 15-1/2" 7 Sprg Ceramic
Block Heater: Immersion
Type110v/120v/1500w
Exhaust: Single Cab-Mtd BOC RH
Fan drive: Blade
Alternator: Delco 33 SI 135 AMP
Batteries: 3 GNB Champion 12V G31
1950 CCA
Starter: Delco 12V 42 MT Overcrank
Compressor: Bendix 13.2 CFM Tuflo
Coolant Hoses: Silicone

Transmission:

Fuller FRO 14210C 10 Speed Concept
2000
Lube: Synthetic Manual Trans/Axles

FRONT AXLE:

12K E-1200I 12K LT WT
Suspension: 12K 64" Taperleaf

REAR AXLE:

BRAKES:

Brake Package: Air-ABS
Front: Eaton ES 15x4
Rear: Eaton ES S-cam 16.5x7 Single
Air Dryer: Bendix AD9 Heated

FRAME:

Frame Rails: 10-1/8x5/16"
Bumper: Aerodynamic
Hooks: One (1) Front Removable
Frame Access: Grab Handle-/Ladder LH
Mounted
Deck Plate: 2' Aluminum
Fifth Wheel: Fontaine SL5AWB-D259-1
24" Air

FRAME:

Frame Rails: 10-1/8x5/16"
Bumper: Aerodynamic
Hooks: One (1) Front Removable
Frame Access: Grab Handle-/Ladder LH
Mounted Deck Plate: 2' Aluminum
Fifth Wheel: Fontaine SL5AWB-D259-1
24" Air

CAB EQUIPMENT

Cab: Conventional Curved Glass

17/26

FIG. 10b

Truck Spec #3 - Kenworth

23K Eaton 23105S (Single)
Suspension: 23K 79KB Taperleaf
Axle Ratio: 3.90
Lube: Synthetic

TRAILER EQUIPMENT

Floodlight: Single Pedestal -Primary
Air Lines: 12' Straight
Electric Lines: 12' Straight
Tractor Kit: BOC Mtd, Bar/Sprg Hanger
Gladhand

[Back To Top](#)

Alum/Fiberglass
Glass: Tinted
Interior Color: Graystone
Mirrors: Dual KW Aero Motor/HTD
Mirrors: Dual Htd 8.5" Convex-Integral
Interior Trim: "New Style" Splendor
Driver Seat: KW Air Cushion Plus HB
Vinyl
Pass Seat: KW Air Cushion Plus HB Vinyl
Exterior Color: White
Wipers: Electric 2 Speed w/Intermittent
Radio: Panasonic AM/FM
w/Cassette/Weatherband
Headlights: Dual Rectangular-Halogen
Ashtray: Two w/lighter (2)
Horn: Dual Round Painted Under Cab
Fairing: Roof Airshield/Undercab/Side
Extenders

Select Options:

BATTERY OPTIONS:

☐ 4 MAINTENANCE FREE BATTERIES
\$138.00

[Back To Top](#)

Calculate Subtotal (Chassis):

70390.00

(reset)


[Back To Top](#)

18/26

Truck Spec #4 - Chasis

FIG. 11a

Truck EZ Specs

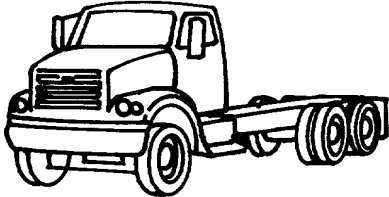

Regional Tractor Truck EZ Spec #4

GE Standard Chassis Spec

PETERBILT **KENWORTH** **FREIGHTLINER** **INTERNATIONAL** **STERLING**

GE Capital Fleet Services

**STANDARD SPEC 4 -- WB 169 -- CA 103 -- GVW 80,000 -- Approximate
Payload 46,000 Lb.**

ENGINE:

375 HP @ 1800 RPM 1450/1550 torque

ENGINE EQUIPMENT:

Fan Drive on/off Kysor
Gates Blue Stripe Radiator Hoses
Block Heater 120v 1500 watt
Alt. 130 Amp
Batteries (3) Maintenance Free 1875
CCA
Radiator Anti Freeze -30 degrees
42MT with Over Crank Starter
Circuit Breakers
Electronic Governor
Vertical Exhaust RH Bright Muffler
Shield
Air Dryer Bendix AD-IP

Transmission:

10 Speed Transmission
Oil Cooler
Clutch Eaton Fuller 15.5
Synthetic Oil
Drive Shaft Meritor 18T 1/2 Round Yoke

FRONT AXLE:

12,000 Lb. Capacity
12,000 Lb. Frt. Suspension
Shock Absorbers
Spring Pins Rubber Bushing
Slack Adjusters Automatic

REAR AXLE:

BRAKES:

ABS Air Brakes
15.0 x 4.0" Air S Cam Frt.
16.5 x 7.0" Air S Cam RR
Drain Valve Cable Operated All Tanks
Hand Control & Tractor Protection
Valves

FRAME:

11/32" x 3 1/2" x 10 3/16"
Deck Plate 20"
Frt. Tow Hooks
Huck-Spin Round Except 5th Wheel
5th Wheel Air Slide Fontaine 6AWB No
Slack 24"
12' Elec. And Air Hoses

FUEL TANKS:

Dual 100 Gal. Tanks
Fuel Water Separator Webb Warm N Dry
w/Heat
23" Diameter Tanks

TIRES AND WHEELS:

11R22.5 Frt Mich. XZA2
11R22.5 RR Mich. XDHT
22.5 x 8.25 Disc Wheels Frt.
22.5 x 8.25 Disc Wheels Rear

CAB EQUIPMENT:

Conventional Cab
Air Conditioning
Dual Rect. 16 x 7" SS Heated W/Moto

19/26

FIG. 11b

Truck Spec #4 - Chasis

40,000 Lb. Capacity
Rear Suspension Air – 40,000 Lb.
Magnetic Drain Plug
Synthetic Lube
Slack Adjusters Automatic
Air Dump Valve


RH Side
Dual Convex Mirrors
One Convex Mirror Hood Mounted RH
Driver Seat High Back Air
Pass Seat Non-Suspension Intermediate
Back V
AM/FM Stereo
Ext. Sun Shade
Gauges – Engine oil, Air and Air Cleaner
Restrict.
Access Frame Non Bright
Steering Wheel Non Telescoping
Intermittant Wipers
Color White

20/26

Truck Spec #4 - Peterbilt

FIG. 12a

Truck EZ Specs

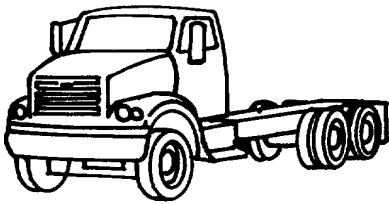

Regional Tractor Truck EZ Spec #4

View GE Standard Chassis Spec

PETERBILT KENWORTH FREIGHTLINER INTERNATIONAL STERLING

GE Capital Fleet Services

**PETERBILT SPEC 4 -- WB 193 -- CA 100 - GCW 80,000 lb - Approx. Payload
42,000 - 46,000 lb**

MODEL 379 6X4 REGIONAL TRACTOR

\$76,693.00

GO TO:

SELECT OPTIONS | CALCULATE SUBTOTAL (CHASSIS)

ENGINE:

Cat C15 375 - 435 HP @ 1800 RPM 1450
- 1550torque

ENGINE EQUIPMENT:

Horton Fan Clutch
Silicone Radiator Hoses
Block Heater 110Volt
Alt. 130 Amp
Batteries (4) Delco 1150 CCA
42MT Starter
Circuit Breakers
Electronic Governor
Vertical Exhaust RH Bright Muffler Shield
Air Dryer Bendix

Transmission:

Fuller FRO16210C
Oil Cooler
Clutch Fuller 15.5 Ceramic

BAKES:

ABS Air Brakes
15.0 x 4.0 Frt. Air Brakes
16.5 x 7.0 Rear Air Brakes
Hand Control & Tractor Protection Valves
Rear magnetic Drain Valve

FRAME:

10 5/8" - 5/16" Rail Thickness
Deck Plate Package
Huck Bolt All Accessible Frm Components
Fontaine Air Slide 5th Wheel
12' Elec. and Air Hoses

FUEL TANKS

Dual 100 Gallon Fuel Tanks
Webb Fuel Water Separator
26" Alum Fuel Tank

21/26

FIG.12B

Truck Spec #4 - Peterbilt

Synthetic Oil
1810 Driveline Half Yoke

FRONT AXLE:

Eaton E12001 12,000 Lbs.
12,000 Lbs. Frt. Suspension
Frt. Shock Absorbers
Slack Adjusters Eaton

REAR AXLE:

Meritor RT40145 40,000 Lbs.
40,000 Lbs. Air Suspension
Auto Slack Adjusters
Synthetic Lube
Ratio 3.90

[Back To Top](#)

TIRES AND WHEELS

11R22.5 Frt. Mich. Tires
11R22.5 Rear Tires Mich.
Frt. Wheels 22.5 x 8.25
Rear Wheels 22.5 x 8.25

CAB EQUIPMENT

Aluminum Cab 119 BBC
Unibilt Day Cab
Air Conditioning
Thermal Insulation
SS Dual heated Mirrors
Dual Convex Mirrors
Driver Seat Hi Back Bucket
Passenger Seat Lo Back Fixed
AM/FM Stereo
Adjustable Steering Column
¼ Fenders Poly
Outside Sunvisor SS
Intermittent Wipers
Color White

Select Options:

Brake Options:

☐ JAKE BREAK \$1,819.00

CAB OPTIONS:

☐ Telescoping/Tilt Wheel \$271.00

[Back To Top](#)

Calculate Subtotal (Chassis):

76693.00

[\(reset\)](#)


[Back To Top](#)

22/26

Truck Spec #5 - Chassis

Truck EZ Specs

FIG. 13a



Over the Road Sleeper Tractor Truck EZ Spec #5

GE Standard Chassis Spec

PETERBILT KENWORTH FREIGHTLINER INTERNATIONAL STERLING

GE Capital Fleet Services

STANDARD SPEC 5 - WB 248 - CA 130 - GVW 80,000 - Approx. Payload 42,000-44,000 Lb.

ENGINE:

475 HP @ 2100 RPM 1650 Lb. Torque

ENGINE EQUIPMENT:

Fan Drive on/off Kysor
Silicone Radiator Hoses
Block Heater 120v 1500 watt Jeb
Alt. 135 Amp
Batteries (4) Maintenance Free 2600 CCA
Radiator Anti Freeze -30 degrees
42MT with Over Crank Starter
Circuit Breakers
Electronic Governor
Vertical Exhaust RH Bright Muffler Shield
Air Dryer Bendix AD-IP

Transmission:

10 Speed Transmission
Oil Cooler
Clutch Eaton Fuller 15.5 Two Plate Easy Pedal
Synthetic Oil
Drive Line Meritor 18T 1/2 Round Yoke

FRONT AXLE:

12,000 Lb. Capacity Meritor FF-961
12,000 Lb. Frt. Suspension
Shock Absorbers
Spring Pins Rubber Bushing
Slack Adjusters Automatic

BRAKES:

ABS Air Brakes
15.0 x 4.0" Air S Cam Frt.
16.5 x 7.0" Air S Cam RR
Drain Valve Cable Operated All Tanks
Hand Control & Tractor Protection Valves

FRAME:

11/32" x 3 1/2 x 10 3/16"
Deck Plate 20" & 1/4 Fenders
Frt. Tow Hooks
Huck-Spin Round Except 5th Wheel
5th Wheel Air Slide 24"
12' Elec. And Air Hoses Straight

FUEL TANKS:

Dual 120 Gal. Tanks
Fuel Water Separator /Heated
23" Diameter Tanks

TIRES AND WHEELS:

11R22.5 Frt Mich. XZA2
11R22.5 RR Mich. XDHT
22.5 x 8.25 Disc Wheels Frt.
22.5 x 8.25 Disc Wheels Rear

CAB EQUIPMENT:

Sleeper Cab 48" Hi Rise
Air Conditioning
Dual Rect. 16 x 7" SS Heated W/Moto
RH Side
Dual Convex Mirrors

FIG. 13b

Truck Spec #5 - Chasis

REAR AXLE:

40,000 Lb. Capacity
Rear Suspension 40,000 Lb. Air
Magnetic Drain Plug
Synthetic Lube
Slack Adjusters Automatic
Air Dump Valve
3.90 Ratio


One Convex Mirror Hood Mounted RH
Driver Seat High Back Air
Pass Seat Non-Suspension Intermediate
Back
AM/FM Stereo w/ Cassette
Ext. Sun Shade
Gauges – Engine oil, Air and Air Cleaner
Restrict. Access Frame Non Bright
Steering Wheel Telescoping and Tilting
Intermittant Wipers
Color White

24/26

Truck Spec #5 - Peterbilt

FIG. 14a

Truck EZ Specs



Over the Road Sleeper Tractor Truck EZ Spec #5

View GE Standard Chassis Spec

PETERBILT **KENWORTH** **FREIGHTLINER** **INTERNATIONAL** **STERLING**

GE Capital Fleet Services

**PETERBILT SPEC 5 - WB 250 - CA 160 - GCW 80,000 - Approximate Payload
42,000 - 44,000 Lb.**

MODEL

\$86,648.53

GO TO:

SELECT OPTIONS | CALCULATE SUBTOTAL (CHASSIS)

ENGINE:

Cat C15 475HP @ 1800 RPM 1650 torque

ENGINE EQUIPMENT:

Horton Fan Clutch
Silicone Radiator Hoses
Block Heater 110Volt
Alt. 130 Amp.
Batteries (4) Delco 1150 CCA
42MT Starter
Circuit Breakers
Electronic Governor
Vertical Exhaust RH Bright Muffler Shield
Air Dryer Bendix

Transmission:

Fuller FRO16210C
Oil Cooler
Clutch Fuller 15.5 Ceramic
Synthetic Oil

BRAKES:

ABS Air Brakes
15.0 x 4.0 Frt. Air Brakes
16.5 x 7.0 Rear Air Brakes
Hand Control & Tractor Protection Valves
Rear magnetic Drain Valve

FRAME:

10 5/8" - 5/16" Rail Thickness
Deck Plate Package
Huck Bolt All Accessible Frm Components
Fontaine Air Slide 5th Wheel
12' Elec. and Air Hoses

FUEL TANKS

Dual 120 Gallon Fuel Tanks
Webb Fuel Water Separator
26" Alum Fuel Tank

FIG. 14b

Truck Spec #5 - Peterbilt

1810 Driveline Half Yoke

FRONT AXLE:

Eaton E12001 12,000 Lbs.
12,000 Lbs. Frt. Suspension
Frt. Shock Absorbers
Slack Adjusters Eaton

REAR AXLE:

Meritor RT40145 40,000 Lbs.
40,000 Lbs. Air Suspension
Auto Slack Adjusters
Synthetic Lube
Ratio 3.90

TIRES AND WHEELS

11R22.5 Frt. Mich. Tires
11R22.5 Rear Tires Mich.
Frt. Wheels 22.5 x 8.25
Rear Wheels 22.5 x 8.25

CAB EQUIPMENT

Aluminum Cab 119 BBC
48" Sleeper w/Aero Dynamics
Air Conditioning
Thermal Insulation
SS Dual heated Mirrors
Dual Convex Mirrors
Driver Seat Hi Back Bucket
Passenger Seat Hi Back Air
AM/FM Cassette Stereo
Adjustable Steering Column
¼ Fenders Poly
Outside Sunvisor SS
Intermittent Wipers
Color White
Class III Interior

Select Options:**Brake Options:**
☐ JAKE Break \$1,819.00
ENGINES AND TRANSMISSIONS:
☐ 13 Speed Transmission (Fuller
RTLO18913A) \$3,885.00
FUEL TANKS:
☐ DUAL 150 GALLON \$835.00
CAB OPTIONS:
☐ Telescoping/Tilt Wheel \$271.00
[Back To Top](#)**Calculate Subtotal (Chassis):**

86648.53

(reset)

[Back To Top](#)

FIG. 15

